



Key Features

- Ideal for access control and POS installations
- Eca Euro Class LSZH Cable
- DoP and Test Class printed on Cable
- Temperature Rating -20°C to 70°C
- Voltage Rating 300V Max
- Single Pair with overall Braided Shield

Overview

Aura Multicore cables manufactured and designed for sound broadcast, audio and instrumentation offering an alternative Belden style cable, with tinned copper conductors. A triple pair cable with 22 AWG size conductors, Drain Wire and foil shield per pair in an LSZH Grey Sheath rated as Euroclass Eca.


Product Specifications

Feature	Values
Diameter of conductor	TC 0.25 ±0.008 x 7
AWG size	22
Core identification	Red/Black, Green/Black, White/Black
Conductor screening	Foil
Outer sheath material	LSZH
Outer sheath colour	Grey
Flame retardant according to IEC 60332-1-2	yes
Halogen free (acc. IEC 60754-2)	yes
Reaction-to-fire class according to EN 13501-6	Eca
Outer diameter approx.	6.90mm ± 0.2
Min. permitted bending radius, stationary application/permanent installation	75 mm
Operating Temperature Range	-20...70 °C
Category	Multipair Individually Screened

Additional specifications

Features	Values
Insulation thickness	0.84mm
Drain Wire	TC0.25 ±0.008 x 7 per pair
Max Conductor Dc Resistance	< 54.2 MΩ/KM @ 20°C
Min Insulation DC Resistance	> 200 MΩ/KM @ 20°C
Number of Pairs	3
Alternative to Belden	8777
Conductor to Conductor Capacitance	88pF/m ±20
Conductor to Shield Capacitance	180pF/m ±25
Voltage Rating	300 Max

Product drawing

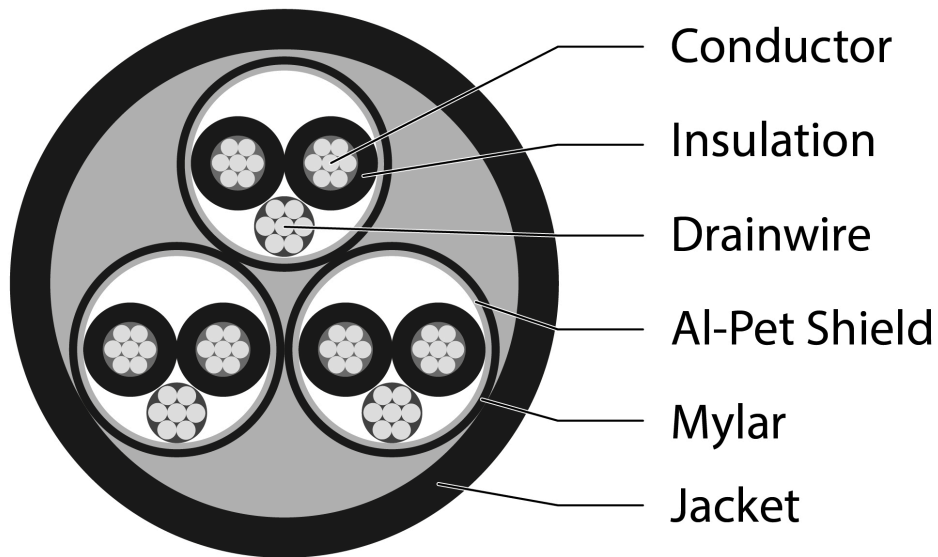

Standards

Applicable standard	Detail
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III)
WFD	Compliant to Waste Framework Directive
SCIP	Compliant - Does Not Contain Substances of Concern in Products

Partcodes

Partcodes	Description
2203PIFPP	aura 22AWG 3 Pair Belden Alternative Multicore Cable LSZH Eca Type 8777 Per Metre Grey